




# webeye™

SECURITY  
SAFETY  
TECHNOLOGY  
INNOVATION

## 008: WEBEYE SPECIFICATION SHEET

# webeye

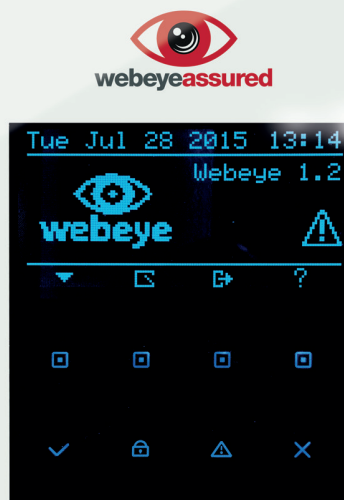

1	2 abc	3 def	A
4 ghi	5 jkl	6 mno	B ☰
7 pqr	8 stu	9 vwx	C +
P	0 yz	↵	D ☰

## webeyeRAPID PANEL WITH GPRS

### webeyeRAPID wireless control panel

- It is designed for residential and small business security applications.
- The alarm panel protects assets and persons in a defined area, thanks to the installations of wireless radio detectors.
- With the two modes of transmission, LAN and GSM\*, the panel ensures maximum safety. In case of LAN connection loss, the panel will switch immediately to GSM\* to transmit alarms and videos.
- The available variants allow for any needed combination : LAN, 2G, 2G+LAN, 3G+LAN (available soon).
- In case of power failure, a rechargeable lithium battery will power the system.

#### T. Sales

**UK** +44 (0)115 714 9990

**USA** (863) 588-3757

#### Technical

**UK** +44 (0)115 714 9999

**USA** (863) 588-3757

**E. UK** [sales@webeyecms.com](mailto:sales@webeyecms.com)

**USA** [paul.ellis@webeyecms.com](mailto:paul.ellis@webeyecms.com)

**W.** [www.webeyecms.com](http://www.webeyecms.com)

[www.webeyecorp.com](http://www.webeyecorp.com)



# webeye™

SECURITY  
SAFETY  
TECHNOLOGY  
INNOVATION

## 008: WEBEYE SPECIFICATION SHEET

# webeye

### webeyeRAPID PANEL WITH GPRS

#### webeyeRAPID wireless control panel

RF Network Type	FW2 Two Way Protocol	RSSI signal check. Events Memory (2000 logs)
Frequency Bands (MHz)	868-869 MHz / 916-917 MHz	Local message recorder (record/playback)
Operating Range	500 meters open space	Capabilities
Zones Number	32 wireless, 2 wired zones (remain 30 wireless zones)	Built-in PSTN Dialer/Modem, TCP/IP, GSM/GPRS*
Installer and User Codes	1 installer code, 1 super user, 64 users	Data Transfer
Control Devices	Built-in capacity keypad	USB connection (direct) TCP connection (internal network)
	Two-Way Wireless LCD keypad	Report Channels
	Two -Way Remote Control (Rolling Code)	5, 9*
Outputs	16 outputs, 1 internal siren, 2 available	Report Format
	wired outputs, Wireless Outputs Relays	TCP/IP Contact ID or SIA, PSTN Voice Messages
Display	Built-in LCD Display 64 x 128 pixels	PSTN direct CID or SIA, Email notification,
Arming Modes	Total, Stay, Latchkey, Duress, Bypass	GSM Voice and DTMF* GSM SMS notification &
Languages	12 languages (display and audio messages)	Commands*, GPRS Contact ID or SIA*
	English, French, Hebrew, German, Russian, Spanish, Portuguese, Dutch, Italian, Chinese, Greek & Turkish.	Audio Verification
Internal Souder Output	100 ±3dBA at 1 meter	Full Duplex Two-way voice communication
Supervision	Programmable-7 mins default, 60 sec for PIR-CAM & FW2-LCD Keypad	Power Supply
Special Functions	Zones Bypass, Chime zones, Walk Test Mode and	External AC/DC Plug-In Adaptor 9V/1.3A, 12V (±1V) DC
		Low Battery Threshold
		7.1V (±0.2V) DC
		Backup Battery
		7.2V/2050mAh (24 hrs to charge)
		Dimension
		291 x 165 x 35 mm Weight 1.40Kg with battery
		Operating Temperature Range
		-10° C to 55 °C
		Storage Temperature Range
		-20 °C to 60 °C
		Humidity
		90% relative humidity

#### T. Sales

**UK** +44 (0)115 714 9990

**USA** (863) 588-3757

#### Technical

**UK** +44 (0)115 714 9999

**USA** (863) 588-3757

**E. UK** sales@webeyecms.com

**USA** paul.ellis@webeyecms.com

**W.** www.webeyecms.com

www.webeyecorp.com



# webeye™