


008: WEBEYE SPECIFICATION SHEET

webeye

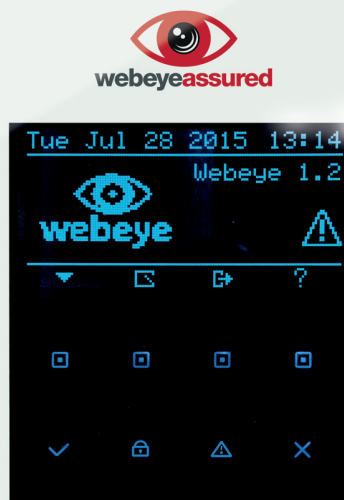

webeyeRAPID PANEL WITHOUT GPRS

webeyeRAPID wireless control panel

- It is designed for residential and small business security applications.
- The alarm panel protects assets and persons in a defined area, thanks to the installations of wireless radio detectors.
- With the two modes of transmission, LAN and GSM*, the panel ensures maximum safety. In case of LAN

connection loss, the panel will switch immediately to GSM* to transmit alarms and videos.

- The available variants allow for any needed combination : LAN, 2G, 2G+LAN, 3G+LAN (available soon).
- In case of power failure, a rechargeable lithium battery will power the system.

T. Sales

UK +44 (0)115 714 9990
USA (863) 588-3757

Technical

UK +44 (0)115 714 9999
USA (863) 588-3757

E. UK sales@webeyecms.com

USA paul.ellis@webeyecms.com

W. www.webeyecms.com
www.webeyecorp.com

008: WEBEYE SPECIFICATION SHEET

webeye

webeyeRAPID PANEL WITHOUT GPRS

webeyeRAPID wireless control panel

RF Network Type	FW2 Two Way Protocol		RSSI signal check. Events Memory (2000 logs)
Frequency Bands (MHz)	868-869 MHz / 916-917 MHz		Local message recorder (record/playback)
Operating Range	500 meters open space	Capabilities	Built-in PSTN Dialer/Modem, TCP/IP, GSM/GPRS*
Zones Number	32 wireless, 2 wired zones (remain 30 wireless zones)	Data Transfer	USB connection (direct) TCP connection (internal network)
Installer and User Codes	1 installer code, 1 super user, 64 users	Report Channels	5, 9*
Control Devices	Built-in capacity keypad	Report Format	TCP/IP Contact ID or SIA, PSTN Voice Messages
	Two-Way Wireless LCD keypad		PSTN direct CID or SIA, Email notification,
	Two -Way Remote Control (Rolling Code)		GSM Voice and DTMF* GSM SMS notification &
Outputs	16 outputs, 1 internal siren, 2 available		Commands*, GPRS Contact ID or SIA*
	wired outputs, Wireless Outputs Relays	Audio Verification	Full Duplex Two-way voice communication
Display	Built-in LCD Display 64 x 128 pixels	Power Supply	External AC/DC Plug-In Adaptor 9V/1.3A, 12V (±1V) DC
Arming Modes	Total, Stay, Latchkey, Duress, Bypass	Low Battery Threshold	7.1V (±0.2V) DC
Languages	12 languages (display and audio messages)	Backup Battery	7.2V/2050mAh (24 hrs to charge)
	English, French, Hebrew, German, Russian, Spanish, Portuguese, Dutch, Italian, Chinese, Greek & Turkish.	Dimension	291 x 165 x 35 mm Weight 1.40Kg with battery
Internal Souder Output	100 ±3dBA at 1 meter	Operating Temperature Range	-10° C to 55 °C
Supervision	Programmable-7 mins default, 60 sec for PIR-CAM & FW2-LCD Keypad	Storage Temperature Range	-20 °C to 60 °C
Special Functions	Zones Bypass, Chime zones, Walk Test Mode and	Humidity	90% relative humidity

T. Sales

UK +44 (0)115 714 9990

USA (863) 588-3757

Technical

UK +44 (0)115 714 9999

USA (863) 588-3757

E. UK sales@webyecms.com

USA paul.ellis@webyecms.com

W. www.webyecms.com

www.webeyecorp.com