




webeye™

SECURITY
SAFETY
TECHNOLOGY
INNOVATION

034:C SPECIFICATION SHEET

cameras

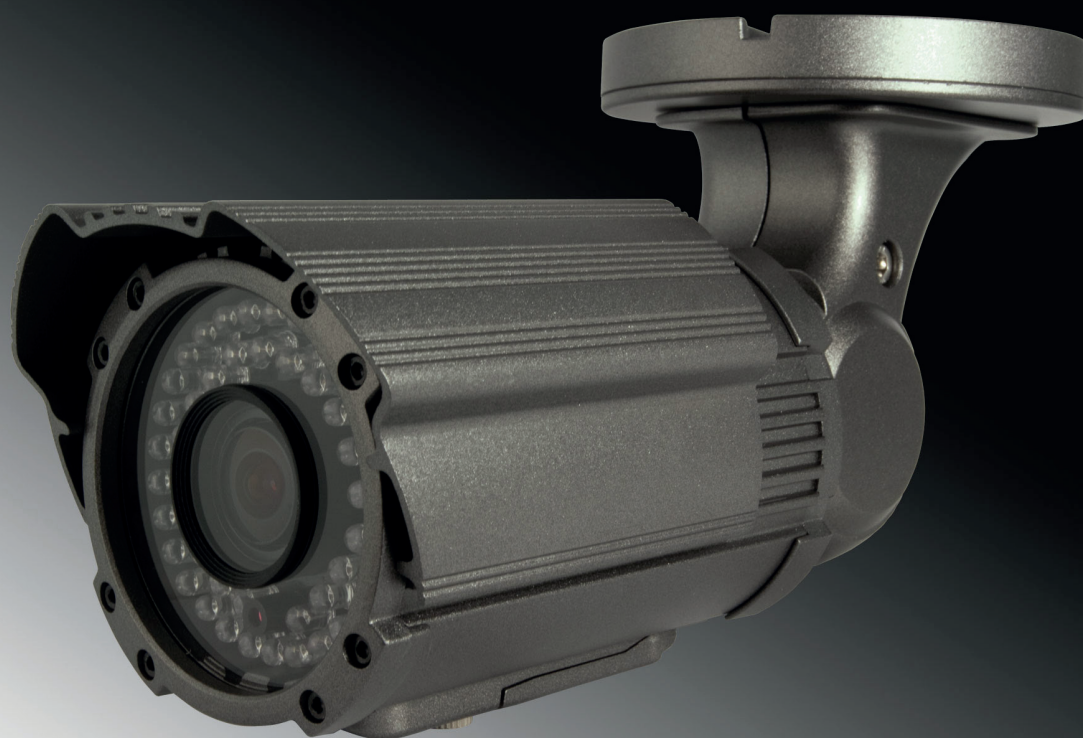

CAM 0144/TVI/650

TVI Vandal Resistant, Day/Night Swivel Camera

- 2.8 - 12mm / 6 - 50mm VF
- Samsung A1 Chipset
- 1/2.8" 2 Mega Sony CMOS
- 1000TVL TVL
- 48 IR LEDs
- 30-40M range

T. Sales

UK +44 (0)115 714 9990

USA (863) 588-3757

Technical

UK +44 (0)115 714 9999

USA (863) 588-3757

E. UK sales@webyecms

USA paul.ellis@webyecms.com

W. www.webyecms.com

www.webyecorp.com



webeye™

SECURITY
SAFETY
TECHNOLOGY
INNOVATION

034:C SPECIFICATION SHEET

cameras

CAM 0144/TVI/650

TVI Vandal Resistant, Day/Night Swivel Camera

CMOS Type	1/3" 2.43 Mega Pixel Progressive Sensor	D-WDR	On/Off
Total Px; Effective Px	2000(H) x 1241(V); 1984(H) x 1097(V)	BLC	On/Off
Min. Illumination Colour:	0.1 Lux @ F1.2 Without DSS	HLC	Level Setting (0-20). Color
	0.002 Lux @ F1.2 With DSS	AGC	Level Setting (0-20)
	B&W: 0.08 Lux@ F1.2 with DSS	D-Zoom	1.0x-8.0x
	0.002 Lux @F1.2 (CDS On)	IP Rating	IP65
HD Video Output	TVI HD 1.0Vp-p 75 Ohms Terminated	Motion Detection	On/Off
Monitor Video Output	NTSC/PAL VBS 1.0Vp-p 75 Ohms Terminated	Privacy Mask	16 Areas (On/Off, Color, Position)
Frame	30fps	Sens-Up	x2, x4, x8, x16, x32
S/N Ratio	>50dB	Supplied Voltage	DC 12V
Shutter Speed	1/30 ~ 1/30,000 Sec	Power Consumption	>800 mA
Lens Type	2.8-12mm vari-focal	Operational Temp.	-10° ~ 50°C
White Balance	Auto/Auto ext/Manual/Push Lock	Storage Temp.	-20°C ~ 60°C
IR Range	30-40M	Operational Humidity	>90%
Motion detection	On/Off	Dimensions	120(W) x 140(H) x 254(D)mm
WDR	On/Off	Weight	1.6Kg

T. Sales

UK +44 (0)115 714 9990

USA (863) 588-3757

Technical

UK +44 (0)115 714 9999

USA (863) 588-3757

E. UK sales@webeyecms

USA paul.ellis@webeyecms.com

W. www.webeyecms.com

www.webeyecorp.com



webeye™