




webeye™

SECURITY
SAFETY
TECHNOLOGY
INNOVATION

027:C SPECIFICATION SHEET

cameras

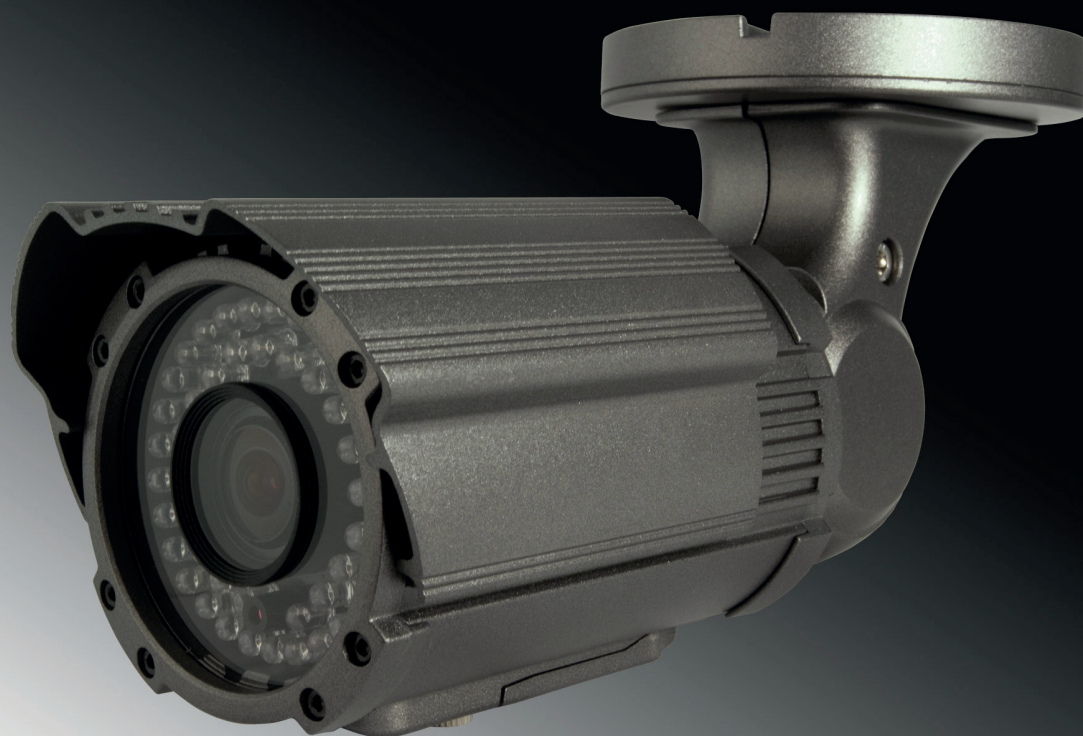

CAM 0144/TVI

TVI Vandal Resistant, Day/Night Swivel Camera

- 2.8 - 12mm / 6 - 50mm VF
- Samsung A1 Chipset
- 1/2.8" 2 Mega Sony CMOS
- 1000TVL TVL
- 48 IR LEDs
- 30-40M range

T. Sales

UK +44 (0)115 714 9990

USA (863) 588-3757

Technical

UK +44 (0)115 714 9999

USA (863) 588-3757

E. UK sales@webyecms.com

USA paul.ellis@webyecms.com

W. www.webyecms.com

www.webyecorp.com



webeye™

SECURITY
SAFETY
TECHNOLOGY
INNOVATION

027:C SPECIFICATION SHEET

cameras

CAM 0144/TVI

TVI Vandal Resistant, Day/Night Swivel Camera

CMOS Type	1/3" 2.43 Mega Pixel Progressive Sensor
Total Px; Effective Px	2000(H) x 1241(V); 1984(H) x 1097(V)
Min. Illumination	Colour: 0.1 Lux @ F1.2 Without DSS
	0.002 Lux @ F1.2 With DSS
	B&W: 0.08 Lux@ F1.2 with DSS
	0.002 Lux @F1.2 (CDS On)
HD Video Output	TVI HD 1.0Vp-p 75 Ohms Terminated
Monitor Video Output	NTSC/PAL VBS 1.0Vp-p 75 Ohms Terminated
Frame	30fps
S/N Ratio	>50dB
Shutter Speed	1/30 ~ 1/30,000 Sec
Lens Type	2.8-12mm vari-focal
White Balance	Auto/Auto ext/Manual/Push Lock
IR Range	30-40M
Motion detection	On/Off
WDR	On/Off

D-WDR	On/Off
BLC	On/Off
HLC	Level Setting (0-20). Color
AGC	Level Setting (0-20)
D-Zoom	1.0x-8.0x
IP Rating	IP65
Motion Detection	On/Off
Privacy Mask	16 Areas (On/Off, Color, Position)
Sens-Up	x2, x4, x8, x16, x32
Supplied Voltage	DC 12V
Power Consumption	>800 mA
Operational Temp.	-10° ~ 50°C
Storage Temp.	-20°C ~ 60°C
Operational Humidity	>90%
Dimensions	120(W) x 140(H) x 254(D)mm
Weight	1.6Kg

T. Sales

UK +44 (0)115 714 9990

USA (863) 588-3757

Technical

UK +44 (0)115 714 9999

USA (863) 588-3757

E. UK sales@webeyecms.com

USA paul.ellis@webeyecms.com

W. www.webeyecms.com

www.webeyecorp.com

