



# VIDEOFIED

ULTIMATE SECURITY



## XMA 210 KEYPAD

### LCD ALPHANUMERIC WIRELESS KEYPAD

#### Description

The Keypad Model XMA is a battery operated, wireless alphanumeric keypad device designed for programming and operating Videofied security systems.

The keypad features a two line, 16 character liquid crystal (LCD) display, multi-function push buttons, panic assistance, built-in sounder, and S2View® spread spectrum encrypted wireless circuitry for secure 868MHz/915MHz/920MHz two-way communication with the control panel.

The LCD backlight turns off automatically after 30 seconds of keypad inactivity to conserve battery power. Pressing a button will turn the backlight on.

The keypad can be used to program and configure Videofied security systems. S2View® spread spectrum encrypted wireless circuitry effectively makes the keypad a mobile programmer that can be used anywhere within the installation site during system programming. Because the keypad is a supervised device, once programming is completed the keypad must be permanently mounted or deleted from the system. The easy to understand display guides you through programming, prompting you for simple yes/no or data entry responses. The left and right arrow buttons cycle through menus or values until the desired

option is displayed. Text entries are done using the 0 - 9 buttons and can be in lowercase, uppercase, or a combination of both. Complete punctuation symbols are also available for data entries such as website/IP addresses and component location naming.


The keypad is typically installed near entry/exit doors to allow system users enough time to arm and exit the premises, and to enter and disarm the system before time delay expires. When the system is armed, the built-in sounder emits a series of exit delay beeps to remind the user to exit before the beeps stop. Upon entering the armed premises, the built-in sounder emits entry delay beeps to remind the user to disarm the system to avoid an alarm. A dual tamper function provides detection for both keypad cover and wall tamper.

The keypad is powered by three or four lithium batteries that can last up to four years or more, depending on the amount of keypad activity. The keypad transmits a check-in signal every eight minutes that includes its unique identification code, along with the tamper condition, serial number, date of manufacture, software revision and battery status. Videofied alarm systems support up to three keypads per system.

#### Features

- The S2View® - Spread Spectrum, Videofied, Interactive AES Wireless technology provides optimum signal integrity and security.
- Mobility - program the system from anywhere on site.
- Display - Two line, 16 character display with automatic backlight. 30 second backlight timer to conserve battery power.
- Built-in sounder - provides entry/exit delay beeps and alarm sounds.

- Buttons - complete alphanumeric setting/parameter entries in programming mode; standard and custom operation in normal operating mode.
- Panic assistance - for manual activation anytime.
- Supervised - transmits a check/status signal every 8 minutes indicating tamper state, serial number, date of manufacture, software revision and battery status.
- Dual tamper - provides detection for both wall and cover.

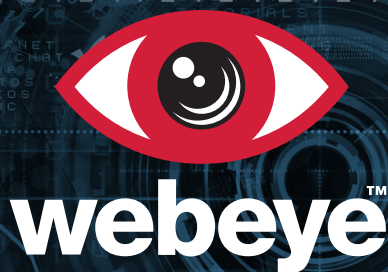

# XMA 210 KEYPAD

Power requirements		Lockout duration	90 second
Type	3.6V SAFT Lithium, LS14500, AA Batteries Only	Memory lifetime	No limit (flash memory)
Nominal Volatage	3.6V	Assistance request	Police/Medical/Fire
Low Voltage Limit	2.1V - LCD will stop functioning but communication is working 3.0V - LCD will function and communication is working	Display type	Liquid-crystal (LCD)
Quantity	3 or 4	Display size	Two lines, 16 characters each
Battery life (estimated)	Up to 4 years	Display backlighting	Automatic
RF Technology		Built-in sounder	
	2 way S2View® RSI Technologies 868MHz frequency hopping	Piezo buzzer	Emits entry/exit delay beeps, alarms
Radio type	Spread Spectrum Bidirectional RF	Panic button	One (Must be programmed/Enabled)
Operating frequency	868MHZ	Operating Temperature	-10°C - +40°C
Transmission security	AES algorithm encryption	Maximum relative humidity	75%, non-condensing
Supervision	Panel polls devices every 8 minutes	Dimensions	160 x 92 x 31mm
Antenna	Integrated	Weight	180 grams
Tamper detection	Wall and cover tampered	Wall Mount	3 Screws (including one for the tamper)
Keypad		Case lock	Mechanical lock and optional screw
Keys	23	Certification & Approvals	
Allowed time for code entry	60s	XMA 210	CE
Number of illegal codes	186 (depending on panel features)		EN50131
User code input attempts before lockout	5		EN300220
			IDA
			NCP
			NFA2P




T: +44 115 714 9990  
E: sales@webeyecms.com



T: +1 (863) 336-6527  
E: sales@webeyecorp.com



T: +27 (087) 820-7010  
E: sales@webeyecms.co.za

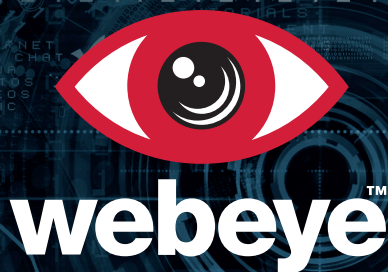

XMA 210 KEYPAD

## 005:V SPECIFICATION SHEET

### FCC Regulatory Information for USA and Canada

FCC Part 15.21 Changes or modifications made to this equipment not expressly approved by RSI VideoTechnologies may void the FCC authorization to operate this equipment. FCC Part 15.105 Class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Radio frequency radiation exposure information according 2.1091 / 2.1093 / OET bulletin 65

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules and with RSS-210 of Industry Canada.

Operation is subject to the following two conditions:

- 1: This device may not cause harmful interference, and
- 2: This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la Partie 15 des réglementations de la FCC et avec la norme RSS-210 de l'Industrie Canadienne. Son fonctionnement est soumis aux deux conditions suivantes :

- 1: Cet appareil ne doit pas causer d'interférences nuisibles et
- 2: Cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indésirable.



T: +44 115 714 9990  
E: sales@webeyecms.com



T: +1 (863) 336-6527  
E: sales@webeyecorp.com



T: +27 (087) 820-7010  
E: sales@webeyecms.co.za